


# REBLOC 50H\_4

## Technical Datasheet

REBLOC 50H\_4


Precast Concrete  
Vehicle Restraint System

Temporary System  
Free standing



### Technical data

Test level	TL1
Working width	42.9 in (1.1 m)
Dynamic deflection	32.7 in (0.8 m)
Installation	free standing on asphalt   concrete
Application	single-sided   double-sided
Minimum installation length	384 ft (117 m; 29 elements)
Initial/end anchorage	not necessary, optional available
Dimensions L x W x H	158.8 x 9.4 x 19.7 in (403 x 24 x 50 cm)
Weight/element	approx. 1168 lb (530 kg)
Curve radius	$r \geq 213$ ft (65 m)
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
Features	rubber pads in contact areas for protection of the road surface

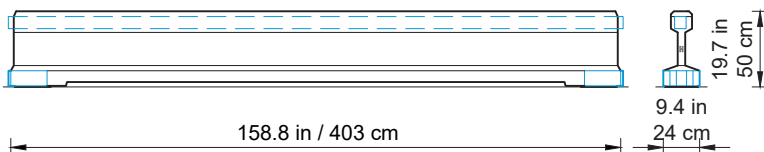

all dimensions in cm