


REBLOC 80SAH_12_8B

Technical Datasheet

Precast Concrete
Vehicle Restraint System


Temporary System
Anchored



REBLOC 80SAH_12-8B

Technical data

Test level	TL3
Working width	23.2 in (0.6 m)
Dynamic deflection	11.0 in (0.3 m)
Installation	anchored in asphalt concrete (8 screwbolts Ø 20/300 mm)
Application	single-sided double-sided
Minimum installation length	197 ft (60 m; 5 elements)
Initial/end anchorage	not necessary, optional available
Dimensions L x W x H	472.4 x 11.8 x 31.5 in (1200 x 30 x 80 cm)
Weight/element	approx. 7209 lb (3270 kg)
Curve radius	$r \geq 853$ ft (260 m)
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
Miscellaneous	elastomer pads in contact areas for protection of the road surface

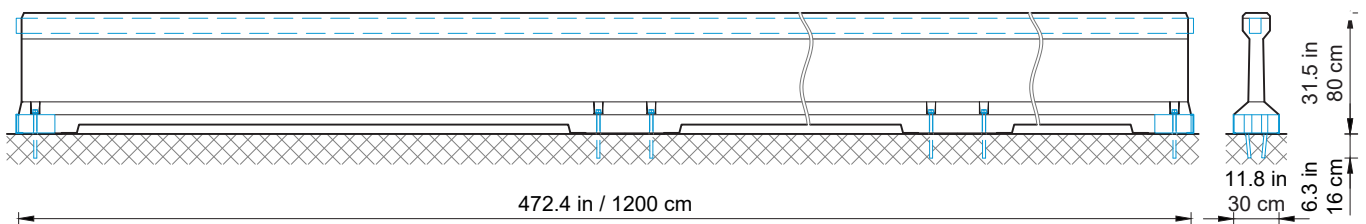

all dimensions in cm