

REBLOC 50H_12


Technical Datasheet

ASI B

REBLOC 50H_12


Precast Concrete
Vehicle Restraint System

Temporary System
Free standing



Technical data

Containment level	H1
Working width	W8 ($W_N \leq 3.5$ m)
Impact severity level	ASI B
Installation	free standing on asphalt concrete
Application	single-sided double-sided
Minimum installation length	156 m (13 elements) + initial/end anchorage
Initial/end anchorage	required (according to anchor chart 39-10500): e.g. REBLOC 50H_2T or force closure
Dimensions L x W x H in cm	1200 x 24 x 50 cm
Weight/element	approx. 1580 kg
Curve radius	$r \geq 200$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
Features	rubber pads in contact areas for protection of the road surface
CE certification	✓

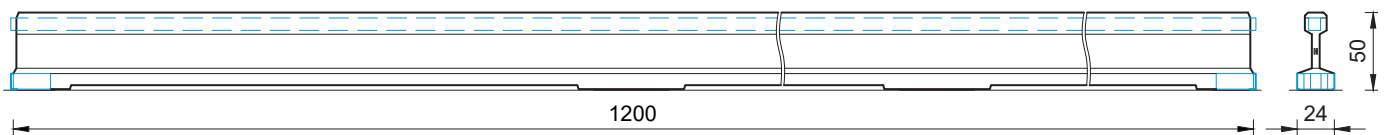

all dimensions in cm