

REBLOC 100L_8

Technical Datasheet

ASI B

REBLOC 100L_8


Precast Concrete
Vehicle Restraint System

Permanent System
Free standing



Technical data

Containment level	L2 / H2
Working width	W5 ($W_N \leq 1.7$ m)
Impact severity level	ASI B
Vehicle intrusion	VI5 ($VI_N \leq 1.7$ m)
Installation	free standing on asphalt concrete
Application	single-sided double-sided
Minimum installation length	80 m (10 elements) + initial/end anchorage
Initial/end anchorage	required (according to anchor chart 39-10501): e.g. REBLOC 100_4T or force closure
Dimensions L x W x H in cm	800 x 64 x 100 cm
Weight/element	approx. 5980 kg
Curve radius	$r \geq 110$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓

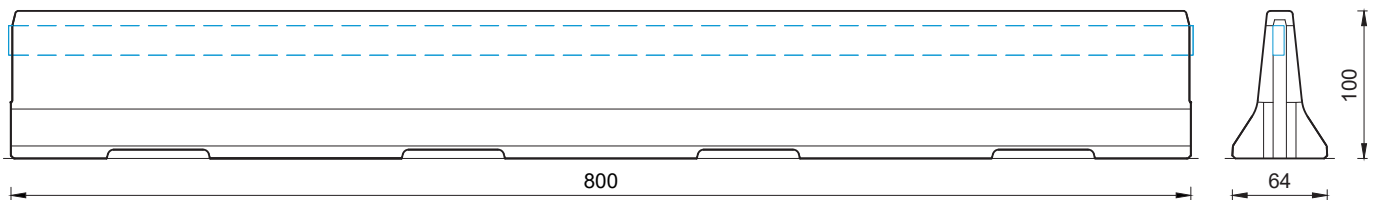

all dimensions in cm