

# REBLOC 80HX\_8

## Technical Datasheet

ASI B

Precast Concrete  
Vehicle Restraint System


Permanent System  
Free standing



REBLOC 80HX\_8

### Technical data

Containment level	L1 / H1
Working width	W4 ( $W_N \leq 1.3$ m)
Impact severity level	ASI B
Vehicle intrusion	VI4 ( $VI_N \leq 1.3$ m)
Installation	free standing on asphalt   concrete
Application	single-sided   double-sided
Minimum installation length	80 m (10 elements) + initial/end anchorage
Initial/end anchorage	required (according to anchor chart 39-10501): e.g. REBLOC 80X_4T or force closure
Dimensions L x W x H in cm	800 x 59 x 80 cm
Weight/element	approx. 4620 kg
Curve radius	$r \geq 235$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓

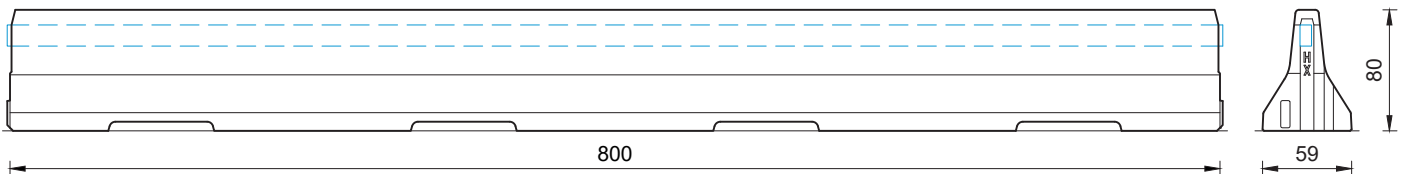

all dimensions in cm