


REBLOC 80XAS_8

Technical Datasheet

ASI B

Precast Concrete
Vehicle Restraint System


Permanent System
Free standing

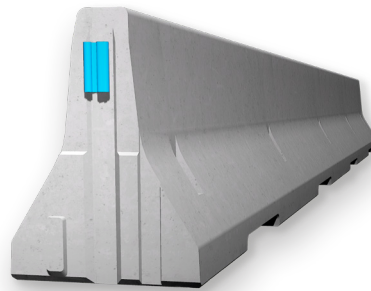

REBLOC 80XAS_8

Technical data

Containment level	L2 / H2
Working width	W4 ($W_N \leq 1.3$ m)
Impact severity level	ASI B
Vehicle intrusion	VI3 ($VI_N \leq 1.0$ m)
Installation	free standing on asphalt concrete
Application	single-sided double-sided
Minimum installation length	80 m (10 elements) + initial/end anchorage
Initial/end anchorage	required (according to anchor chart 39-10501): e.g. REBLOC 80X_4T or force closure
Dimensions L x W x H in cm	800 x 59 x 80 cm
Weight/element	approx. 4670 kg
Curve radius	$r \geq 235$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓

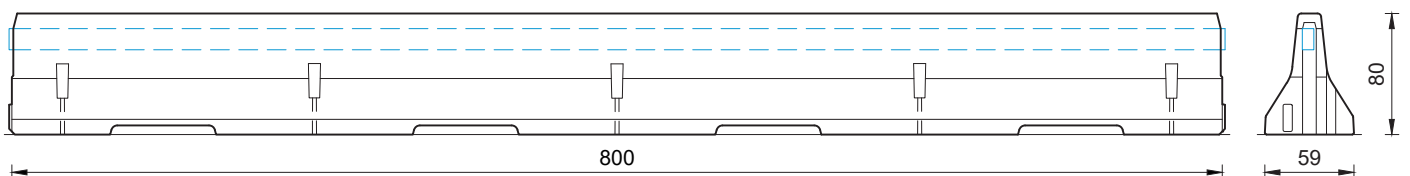

all dimensions in cm