

REBLOC 80XAS_8_3A.1


Technical Datasheet

ASI B

REBLOC 80XAS_8_3A.1


Precast Concrete
Vehicle Restraint System

Permanent System
Anchored

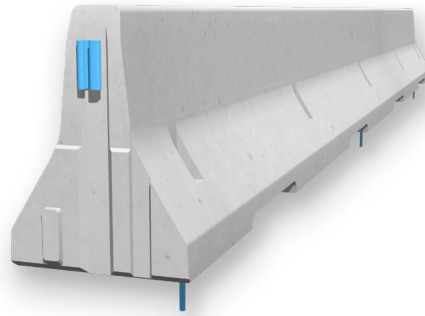

Technical data

Containment level	L2 / H2
Working width	W2 ($W_N \leq 0.8$ m)
Impact severity level	ASI B
Vehicle intrusion	VI3 ($VI_N \leq 1.0$ m)
Installation	anchored in asphalt concrete (per element 3 x adhesive anchors M20 on the front or rear side)
Application	single-sided double-sided
Minimum installation length	56 m (7 elements)
Initial/end anchorage	not necessary, optional available
Dimensions L x W x H in cm	800 x 59 x 80
Weight/element	approx. 4670 kg
Curve radius	$r \geq 235$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓

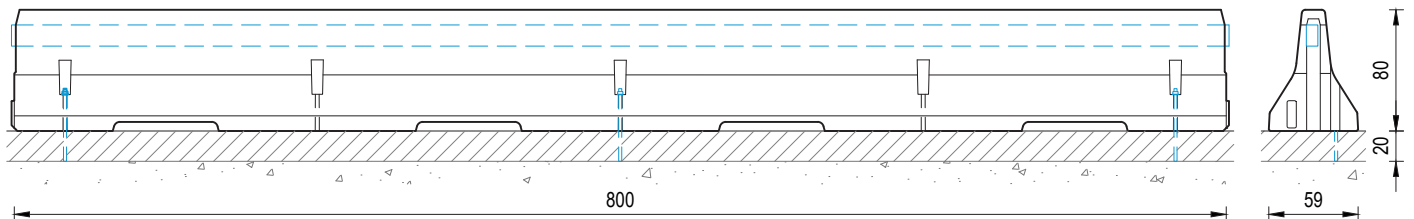

all dimensions in cm