

REBLOC 80XAS_8_4P


Technical Datasheet

ASI B

REBLOC 80XAS_8_4P


Precast Concrete
Vehicle Restraint System

Permanent System
Anchored

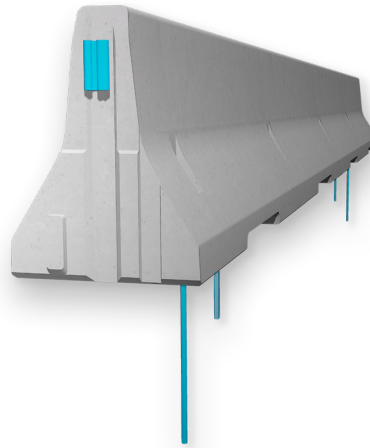

Technical data

| | |
|------------------------------|------------------------------------------------------------------------------------------|
| Containment level | L2 / H2 |
| Working width | W3 ($W_N \leq 1.0$ m) |
| Impact severity level | ASI B |
| Vehicle intrusion | VI3 ($VI_N \leq 1.0$ m) |
| Installation | anchored in compacted soil (per element 4 x anchor pins RPIN20_1280) |
| Application | single-sided double-sided |
| Minimum installation length | 64 m (8 elements) + initial/end anchorage |
| Initial/end anchorage | required: e.g. REBLOC 80X_4T (2 x anchor pins RPIN20_1042 oder 1280) or force closure |
| Dimensions L x W x H in cm | 800 x 59 x 80 |
| Weight/element | approx. 4620 kg |
| Curve radius | $r \geq 235$ m, smaller radii on request |
| Coupling/exposed steel parts | fully integrated, exposed parts hot-dip galvanized |
| CE certification | ✓ |

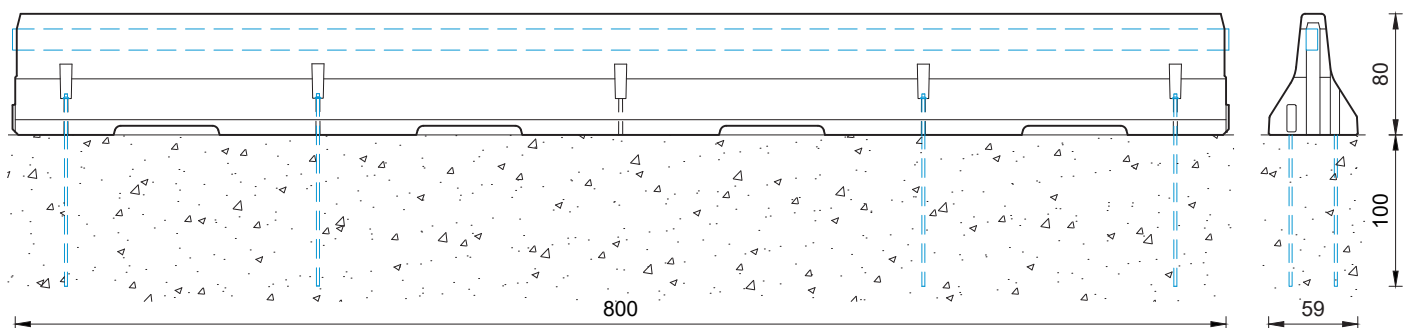

all dimensions in cm