

# REBLOC 84XEAL\_8

## Technical Datasheet

ASI B

Precast Concrete  
Vehicle Restraint System


Permanent System  
Embedded



REBLOC 84XEAL\_8

### Technical data

Containment level	L2 / H2
Working width	W1 ( $W_N \leq 0.6$ m)
Impact severity level	ASI B
Vehicle intrusion	VI2 ( $VI_N \leq 0.8$ m)
Installation	4 cm embedded in asphalt   concrete
Application	single-sided   double-sided
Minimum installation length	40 m (5 elements)
Initial/end anchorage	not necessary, optional available
Dimensions L x W x H in cm	800 x 59 x 84 cm
Weight/element	approx. 4610 kg
Curve radius	$r \geq 235$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓
Types of installation (see design drawings)	system with backfilling double-row installation modified embedding (different abutments)

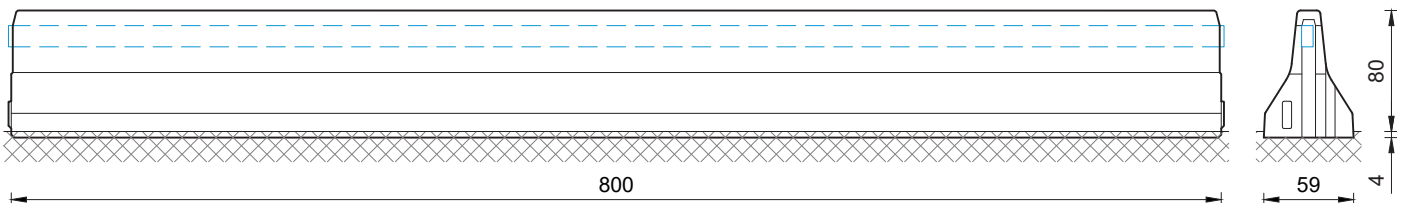

all dimensions in cm