

REBLOC 100XAU_8.7_5A

Technical Datasheet

ASI B

Precast Concrete
Vehicle Restraint System


Permanent System
Anchored



REBLOC 100XAU_8.7_5A

Technical data

Containment level	L4b / H4b
Working width	W2 ($W_N \leq 0.8$ m)
Impact severity level	ASI B
Vehicle intrusion	VI7 ($VI_N \leq 2.5$ m)
Installation	anchored in asphalt concrete (per element 5 x adhesive anchors M20x465)
Application	single-sided
Minimum installation length	52.2 m (6 elements)
Initial/end anchorage	not necessary, optional available
Dimensions L x W x H in cm	870 x 52 x 100 cm
Weight/element	approx. 5840 kg
Curve radius	$r \geq 120$ m (outside of the curve) $r \geq 115$ m (inside of the curve)
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized

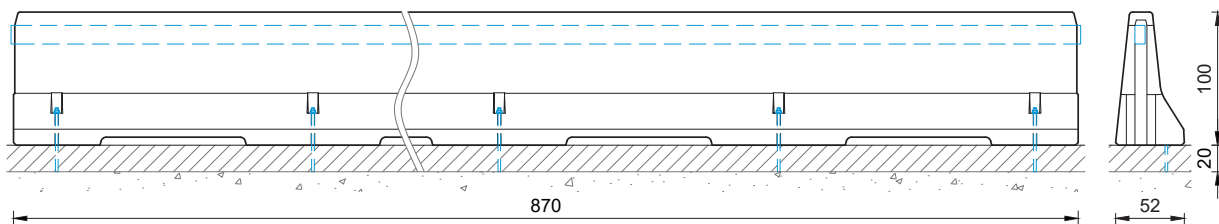

all dimensions in cm