

REBLOC 110_8

Technical Datasheet

ASI B


REBLOC 110_8

Precast Concrete
Vehicle Restraint System

Permanent System
Free standing

**Technical data**

Containment level	L4b / H4b
Working width	W6 ($W_N \leq 2.1$ m)
Impact severity level	ASI B
Vehicle intrusion	V18 ($VI_N \leq 3.5$ m)
Installation	free standing on asphalt concrete
Application	single-sided double-sided
Minimum installation length	104 m (13 elements) + initial/end anchorage
Initial/end anchorage	required (according to anchor chart 39-10501): e.g. REBLOC 110_4.5T or force closure
Dimensions L x W x H in cm	800 x 64 x 110 cm
Weight/element	approx. 6080 kg
Curve radius	$r \geq 110$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓

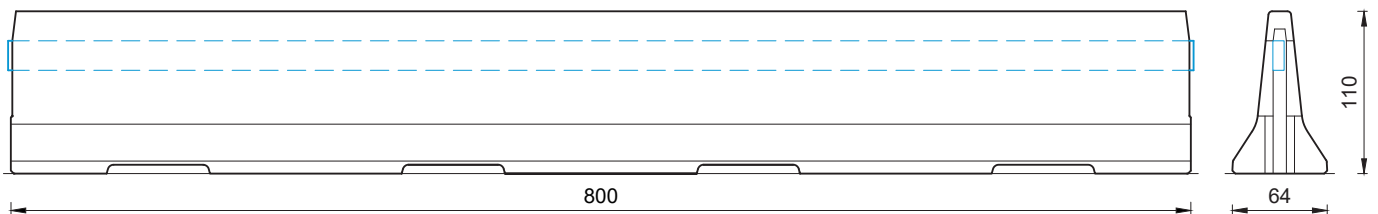

all dimensions in cm