

REBLOC 120.3_7.5


Technical Datasheet

ASI B


REBLOC 120.3_7.5

Precast Concrete
Vehicle Restraint System

Permanent System
Free standing

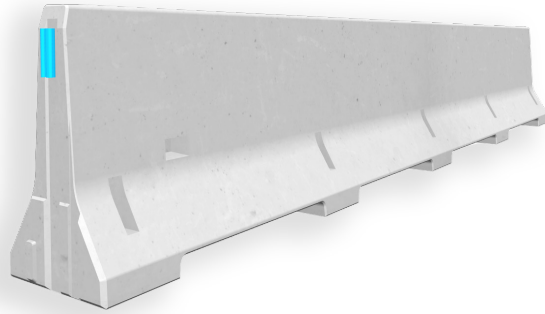**Technical data**

Containment level	L4b / H4b
Working width	W6 ($W_N \leq 2.1$ m)
Impact severity level	ASI B
Vehicle intrusion	VI6 ($VI_N \leq 2.1$ m)
Installation	free standing on asphalt concrete
Installation	single-sided double-sided
Minimum installation length	82.5 m (11 Elemente) + initial/end anchorage
Initial/end anchorage	required (according to anchor chart 39-10501): z.B. REBLOC 120_5T or force closure
Dimensions L x W x H in cm	750 x 67 x 120 cm
Weight/element	approx. 5950 kg
Curve radius	$r \geq 250$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓

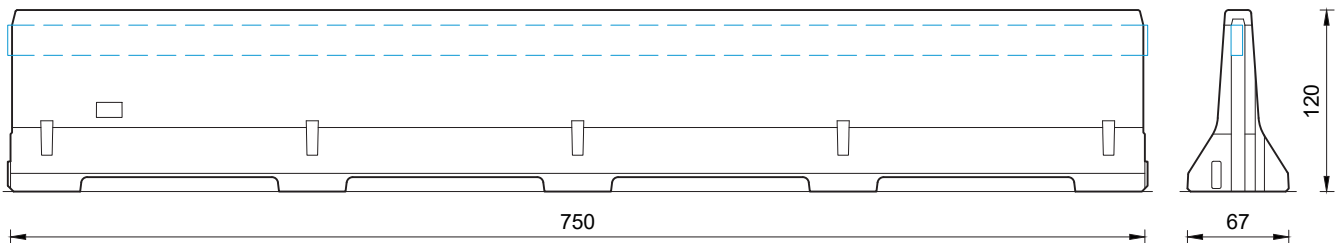

all dimensions in cm