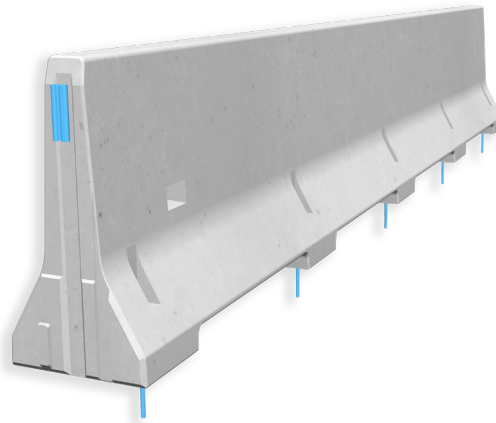


REBLOC 120A.1_7.5_5A


Technical Datasheet

ASI B

REBLOC 120A.1_7.5_5A

**Precast Concrete
Vehicle Restraint System****Permanent System****Anchored****Technical data**

| | |
|------------------------------|---|
| Containment level | L4b / H4b |
| Working width | W2 ($W_N \leq 0.8$ m) |
| Impact severity level | ASI B |
| Vehicle intrusion | VI6 ($VI_N \leq 2.1$ m) |
| Installation | anchored in concrete asphalt (5x adhesive anchors M20x465 per element on the front or back side) |
| Application | single-sided double-sided |
| Minimum installation length | 75 m (10 elements) |
| Initial/end anchorage | not necessary, optional available |
| Dimensions L x W x H in cm | 750 x 67 x 120 cm |
| Weight/element | approx. 6020 kg |
| Curve radius | $r \geq 250$ m, smaller radii on request |
| Coupling/exposed steel parts | fully integrated, exposed parts hot-dip galvanized |
| CE certification | ✓ |

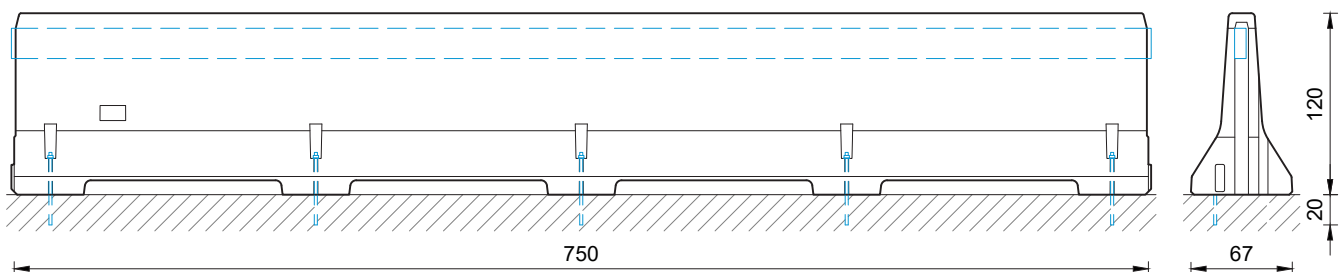

all dimensions in cm