

REBLOC 140SFS_5.5


Technical Datasheet

ASI B


REBLOC 140SFS_5.5

Precast Concrete
Vehicle Restraint System

Permanent System
Free standing

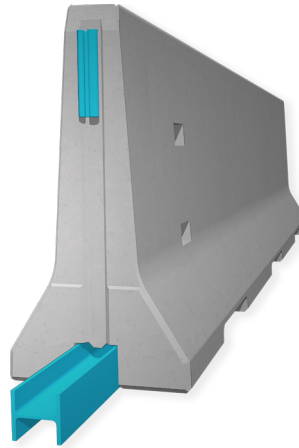**Technical data**

Containment level	L4a / H4a
Working width	W4 ($W_N \leq 1.3$ m)
Impact severity level	ASI B
Vehicle intrusion	VI6 ($VI_N \leq 2.1$ m)
Installation	free standing on asphalt concrete
Application	single-sided double-sided
Minimum installation length	88 m (16 elements) + initial/end anchorage
Initial/end anchorage	required (according to anchor chart 39-10501): e.g. REBLOC 140SFS_6T or force closure
Dimensions L x W x H in cm	550 x 72 x 140 cm
Weight/element	approx. 6030 kg
Curve radius	$r \geq 195$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓

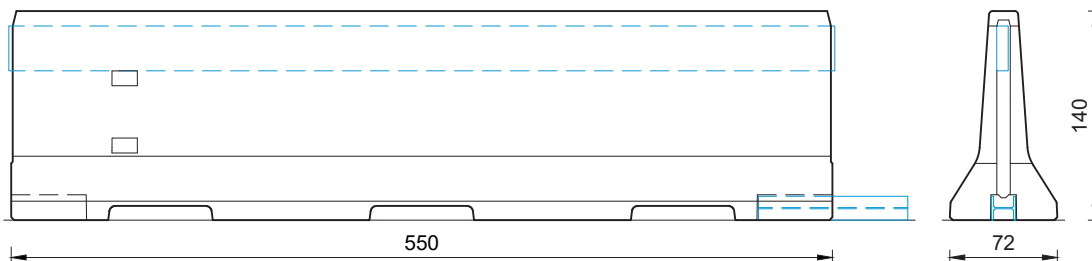

all dimensions in cm