


REBLOC 80H_8LCS

Technical Datasheet

ASI B

REBLOC 80H_8LCS

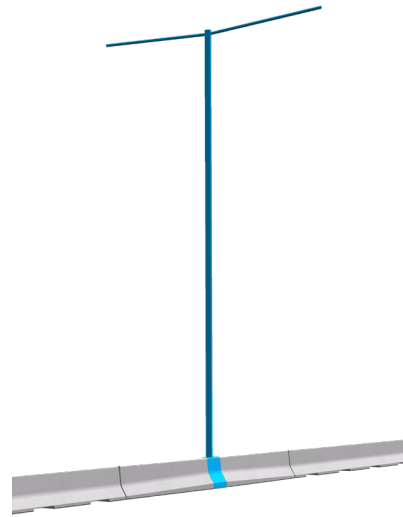


**Precast Concrete
Vehicle Restraint System**

**Permanent System
Light column system
Free standing**

Technical data

| | |
|--|--|
| Containment level | N2 |
| Working width | W3 ($W_N \leq 1.0$ m) |
| Impact severity level | ASI B |
| Installation | free standing on asphalt concrete |
| Application | single-sided double-sided |
| Minimum installation length | 72 m (9 elements) + initial/end anchorage |
| Initial/end anchorage | required (according to anchor chart 39-10501): e.g. REBLOC 80H_4T 80H_7T or force closure |
| Light column element 80H_8LC.1 Dimensions L x W x H in cm Weight | 800 x 56-70 x 80 cm approx. 5190 kg |
| Barrier element 80H_8 80H_8EI.1 Dimensions L x W x H in cm Weight | 800 x 56 x 80 cm approx. 3880 kg |
| Curve radius | $r \geq 225$ m, smaller radii on request |
| Coupling/exposed steel parts | fully integrated, exposed parts hot-dip galvanized |
| Mounting cradle for light column | 4 x M24; 200/200mm |
| CE certification | ✓ |

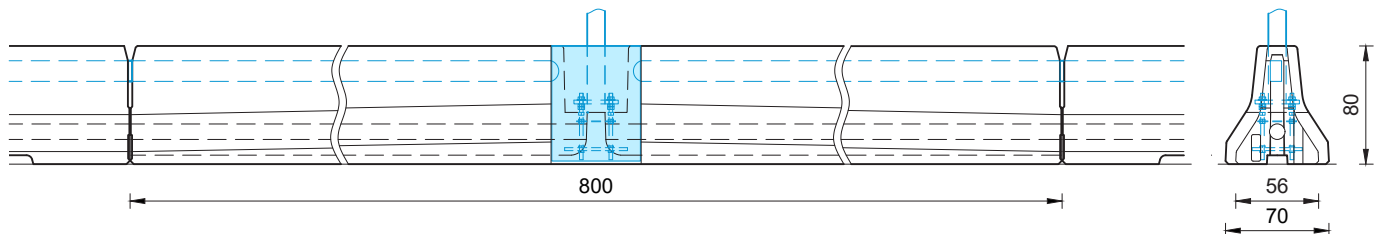

all dimensions in cm