

REBLOC 80SA_4


Technical Datasheet

ASI B

REBLOC 80SA_4


Precast Concrete
Vehicle Restraint System

Temporary System
Anchored

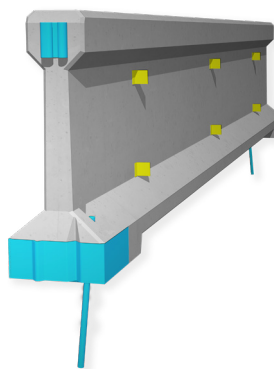

Technical data

Containment level	N2
Working width	W1 ($W_N \leq 0.6$ m)
Impact severity level	ASI B
Installation	anchored in asphalt (per element 2 x anchor pins RPIN20_480)
Application	single-sided double-sided
Minimum installation length	120 m (30 elements)
Initial/end anchorage	not necessary, optional available
Dimensions L x W x H	403 x 30 x 80 cm
Weight/element	ca. 1010 kg
Curve radius	$r \geq 86$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
Features	rubber pads in contact areas for protection of the road surface
CE certification	system characteristics determined on the basis of simulations (CEN/TR 16303-4:2012); certification not possible

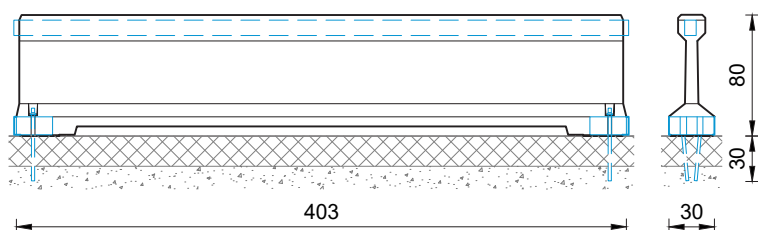

all dimensions in cm