


REBLOC 80S_12


Technical Datasheet

ASI B

REBLOC 80S_12

**Precast Concrete
Vehicle Restraint System****Temporary System
Free standing****Technical data**

Containment level	N2
Working width	W4 ($W_N \leq 1.3$ m)
Impact severity level	ASI B
Installation	free standing on asphalt concrete
Application	single-sided double-sided
Minimum installation length	120 m (10 elements) + initial/end anchorage
Initial/end anchorage	required (according to anchor chart 39-10500): e.g. REBLOC 80S_4T_S37 or force closure
Dimensions L x W x H in cm	1200 x 30 x 80 cm
Weight/element	approx. 2980 kg
Curve radius	$r \geq 260$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
Features	rubber pads in contact areas for protection of the road surface
CE certification	✓

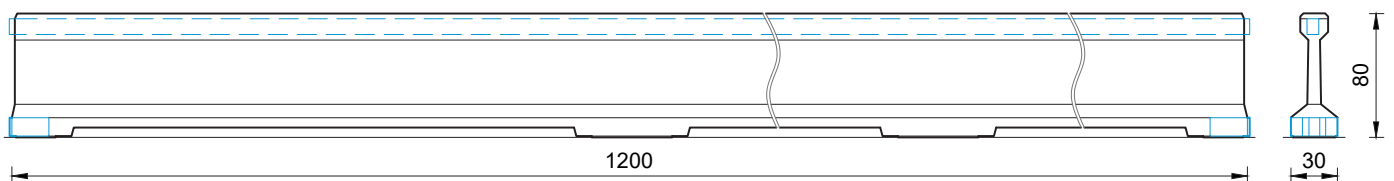

all dimensions in cm