

REBLOC 80XA_8


Technical Datasheet

ASI B


REBLOC 80XA_8

Precast Concrete
Vehicle Restraint System

Permanent System
Free standing

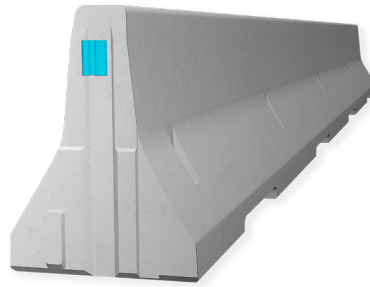**Technical data**

Containment level	N2
Working width	W3 ($W_N \leq 1.0$ m)
Impact severity level	ASI B
Installation	free standing on asphalt concrete
Application	single-sided double-sided
Minimum installation length	112 m (14 elements) + initial/end anchorage
Initial/end anchorage	required (according to anchor chart 39-10501): e.g. REBLOC 80X_4T or force closure
Dimensions L x W x H in cm	800 x 59 x 80
Weight/element	approx. 4620 kg
Curve radius	$r \geq 250$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓

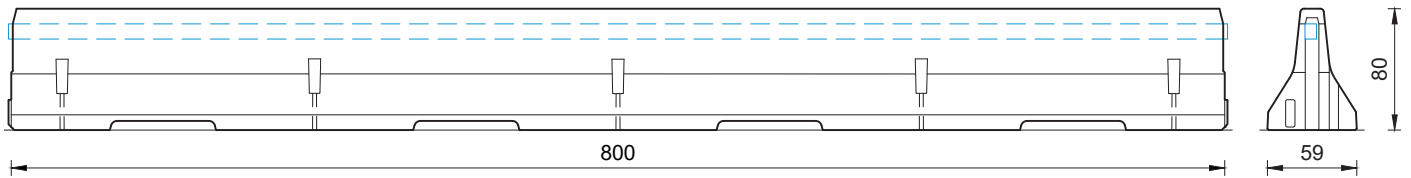

all dimensions in cm