

**REBLOC 84XEA.3\_8**

Technical Datasheet

ASI B

**Precast Concrete  
Vehicle Restraint System**


**Permanent System  
Free standing**



REBLOC 84XEA.3\_8

**Technical data**

Containment level	<b>N2</b>
Working width	<b>W3 (<math>W_N \leq 1.0</math> m)</b>
Impact severity level	<b>ASI B</b>
Installation	<b>free standing on asphalt   concrete</b>
Application	<b>single-sided   double-sided</b>
Minimum installation length	<b>112 m (14 elements) + initial/end anchorage</b>
Initial/end anchorage	<b>required (according to anchor chart 39-10501): e.g. REBLOC 84XEA_4T.01 or force closure</b>
Dimensions L x W x H in cm	<b>800 x 59 x 84 cm</b>
Weight/element	<b>approx. 4570 kg</b>
Curve radius	<b><math>r \geq 240</math> m, smaller radii on request</b>
Coupling/exposed steel parts	<b>fully integrated, exposed parts hot-dip galvanized</b>
CE certification	<b>✓</b>

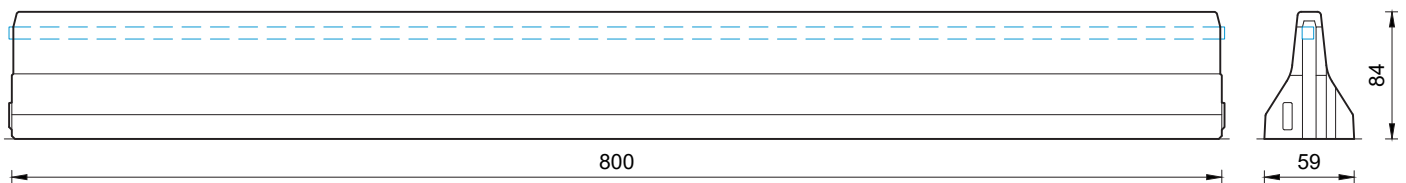

all dimensions in cm