

**MINIBLOC 50C\_2+HR80**

## Technical Datasheet

ASI A


MINIBLOC 50C\_2+HR80

**Precast Concrete  
Vehicle Restraint System**

Securement of  
urban and industrial areas  
Free standing

**Technical data**

Containment level	T1
Working width	W1 ( $W_N \leq 0.6$ m)
Impact severity level	ASI A
Installation	free standing on asphalt   concrete
Application	single-sided   double-sided
Minimum installation length	38 m (19 elements)
End anchorage	not necessary, optional available
Dimensions L x W x H in cm	200 x 40 x 50 cm (concrete element) + 80 cm (handrail)
Weight/element	510 kg (concrete element) + 13 kg (handrail)
Curve radius	$r \geq 16$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized

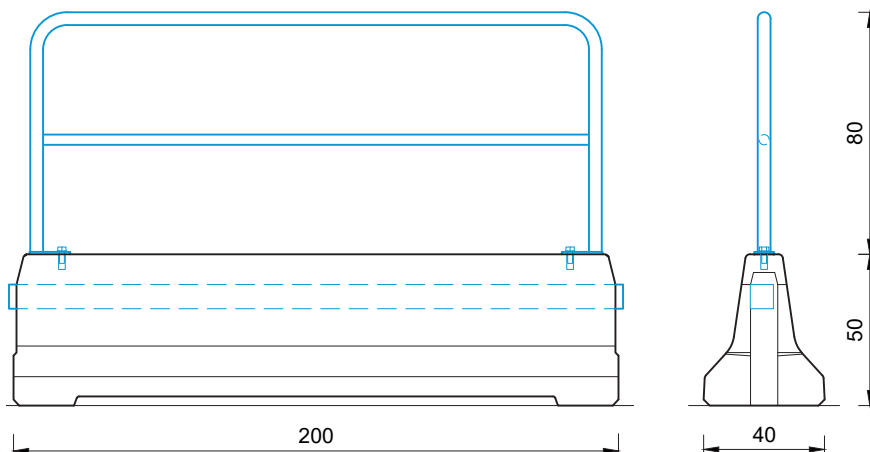

all dimensions in cm

**REBLOC GmbH**

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria  
Tel.: +43 (0) 2985 30528 2900  
Fax: +43 (0) 2985 30528 2901

office@rebloc.com | [www.rebloc.com](http://www.rebloc.com)