

# REBLOC 80SAQ\_12


Technical Datasheet

ASI A

REBLOC 80SAQ\_12


Precast Concrete  
Vehicle Restraint System

Temporary System  
Free standing



## Technical data

Containment level	T3
Working width	W1 ( $W_N \leq 0.6$ m)
Impact severity level	ASI A
Installation	free standing on asphalt   concrete
Application	single-sided   double-sided
Minimum installation length	144 m (12 elements)*
Initial/end anchorage	not necessary, optional available
Dimensions L x W x H in cm	1200 x 30 x 80 cm
Weight/element	approx. 3000 kg
Curve radius	$r \geq 260$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
Features	rubber pads in contact areas for protection of the road surface

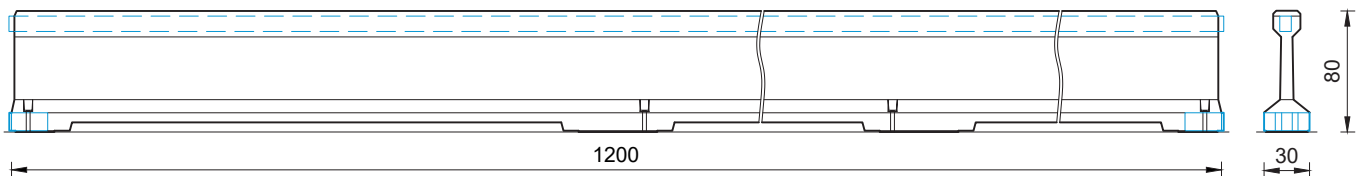

\* 120 m (10 elements) if working width W2 is sufficient

all dimensions in cm