

REBLOC 80SA_6


Technical Datasheet

ASI A

REBLOC 80SA_6


Precast Concrete
Vehicle Restraint System

Temporary System
Free standing



Technical data

Containment level	T3
Working width	W1 ($W_N \leq 0.6$ m)
Impact severity level	ASI A
Installation	free standing on asphalt concrete
Application	single-sided double-sided
Minimum installation length	144 m (24 elements)*
Initial/end anchorage	not necessary, optional available**
Dimensions L x W x H in cm	600 x 30 x 80 cm
Weight/element	approx. 1520 kg
Curve radius	$r \geq 130$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
Features	rubber pads in contact areas for protection of the road surface

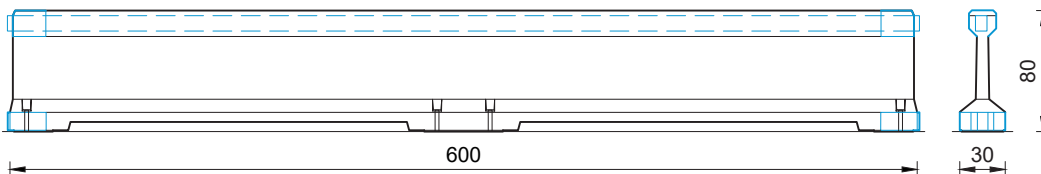

* 72 m (12 elements) plus initial/end anchorage if working width W2 is sufficient

** Required for T3W2 with shortened minimum installation length (72 m plus initial/end anchorage). Anchorage according to anchor chart 39-10500.

all dimensions in cm