
REFENCE 80S_12+104

Technical Datasheet

Precast Concrete Vehicle Restraint System with integrated Fence

Temporary System Free standing




ASI B

REFENCE 80S_12+104

Technical data

Containment level	Т3
Working width	W2 (W _N ≤ 0.8 m)
Impact severity level	ASI B
Vehicle intrusion	VI2 (VI _N ≤ 0.8 m)
Installation	free standing on asphalt concrete
Application	single-sided double-sided
Minimum installation length	180 m (15 concrete elements)
End anchorage	not necessary, optional available
Dimensions L x W x H in cm	1200 x 30 x 184 cm (height concrete element 80 cm + height top fence 104 cm)
Weight/element	approx. 2980 kg (concrete element)
Curve radius	r ≥ 260 m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized

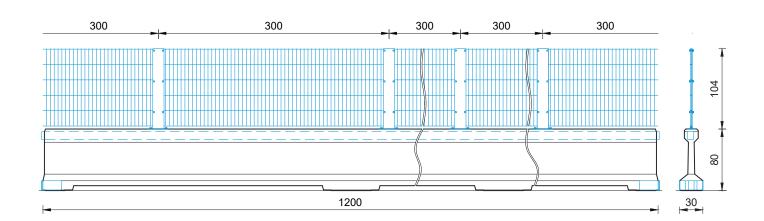

all dimensions in cm

