
## **REFENCE 80S\_12+124**

**Technical Datasheet** 

ASI B

Precast Concrete Vehicle Restraint System with integrated Fence


**Temporary System Free standing** 

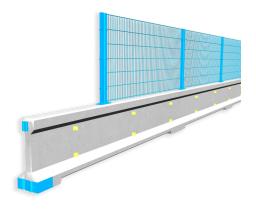

REFENCE 80S\_12+124

## **Technical data**

Containment level	T3
Working width	W3 (W <sub>N</sub> ≤ 1.0 m)
Impact severity level	ASI B
Vehicle intrusion	VI2 (VI <sub>N</sub> ≤ 0,8 m)
Installation	free standing on asphalt   concrete
Application	single-sided   double-sided
Minimum installation length	180 m (15 concrete elements)
End anchorage	not necessary, optional available
Dimensions L x W x H in cm	1200 x 30 x 204 cm (height concrete element 80 cm $+$ height top fence 124 cm)
Weight/element	approx. 2980 kg (concrete element)
Curve radius	r ≥ 260 m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized

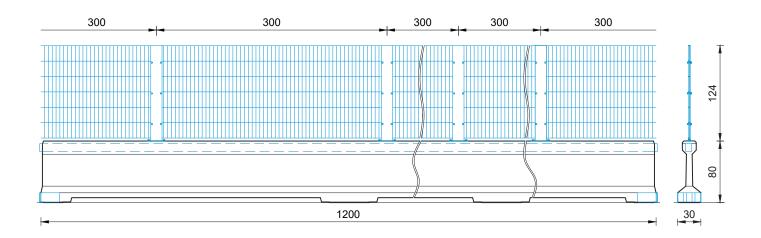

all dimensions in cm

