

TR F40 EDSP 2.0

↔ REBLOC 84XEAL_8

Technical Datasheet

ASI B

TR F40 EDSP 2.0
↔ REBLOC 84XEAL-8


Transition for safety barriers

Steel guardrail
↔ Precast Concrete Barrier
Anchored



Technical data

| | |
|--|---|
| Containment level | H1 |
| Working width | W4 ($W_N \leq 1.3$ m) |
| Impact severity level | ASI B |
| Vehicle intrusion | VI5 ($VI_N \leq 1.7$ m) |
| Barrier A | EDSP 2.0 H1/W5 |
| Barrier B | REBLOC 84XEAL_8 H2/W1 |
| Required elements | REBLOC 80XAS_3.5MS;01 80XAS_8MS;01 |
| Installation Weight REBLOC 80XAS_3.5MS;01 | anchored on compacted gravel (per element 2 x anchor pins RPIN20_1280) approx. 2130 kg |
| Installation Weight REBLOC 80XAS_8MS;01 | anchored on compacted gravel (per element 8 x anchor pins RPIN20_1280) approx. 4920 kg |
| Installation Weight Steel guardrail | anchored on compacted gravel approx. 720 kg |
| Length of transition | 23 m |
| Application | single-sided |
| Coupling/exposed steel parts | fully integrated, exposed parts hot-dip galvanized |
| Steel system elements | hot-dip galvanized |

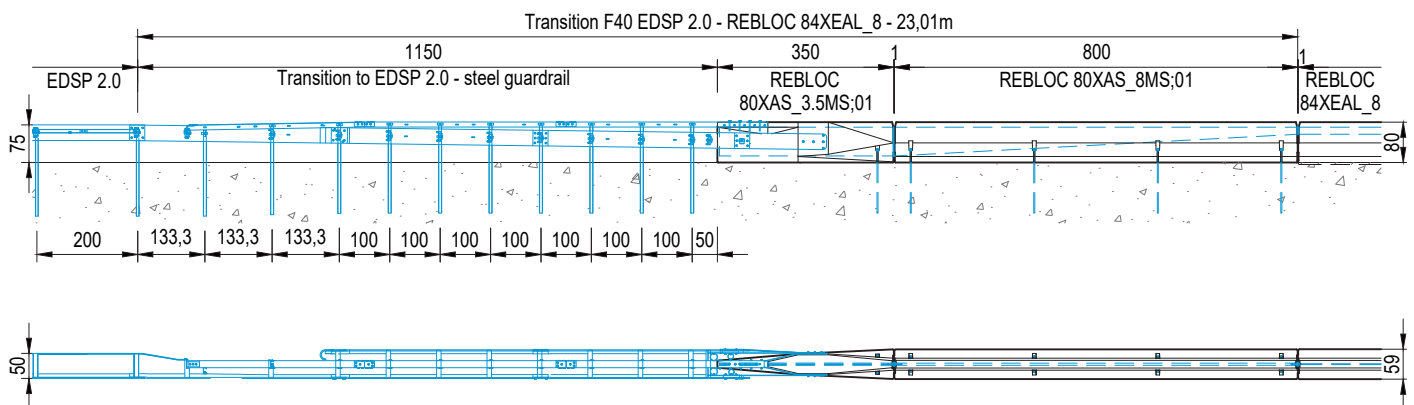

all dimensions in cm