


# TR REBLOC 80H\_8 ⇌ 84XEAL\_8

Technical Datasheet

ASI C

TR REBLOC 80H\_8  
⇌  
84XEAL\_8

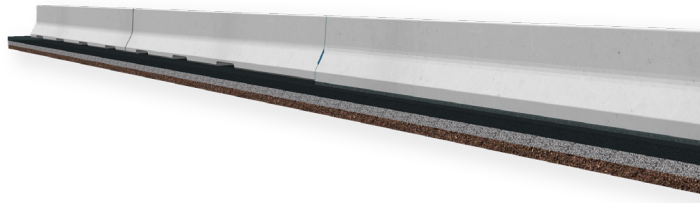


## Transition for safety barriers

Precast Concrete Barrier  
⇌ Precast Concrete Barrier

Free-standing ⇌ embedded in asphalt

## Technical data

Containment level	H2
Working width	W2 ( $W_N \leq 0.8$ m)
Impact severity level	ASI C
Vehicle intrusion	VI2 ( $VI_N \leq 0.8$ m)
Barrier A	REBLOC 80H_8 H2/W5
Barrier B	REBLOC 84XEAL_8 H2/W1
Required elements	REBLOC 80H_84XEAL_8L   REBLOC 84XEAL_8R
Installation   Weight REBLOC 80H_84XEAL_8L	free-standing   approx. 4490 kg
Installation   Weight REBLOC 84XEAL_8R	embedded in asphalt   approx. 5410 kg
Length of transition	16 m
Application	single-sided   double-sided
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
Steel system elements	hot-dip galvanized

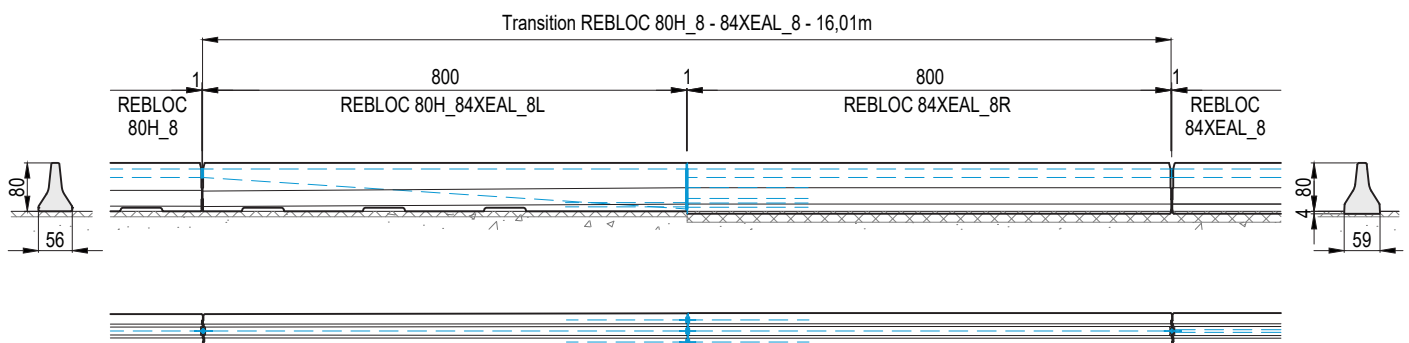

all dimensions in cm