

# Vario Transition TR REBLOC 80H\_8 ↔ TSS Jerseybaer

ASI B

Technical Datasheet




Vario Transition  
TR REBLOC 80H\_8 ↔  
TSS Jerseybaer

## Transition for safety barriers

Precast Concrete Barrier  
↔ In-situ Concrete Barrier  
Free standing

### Technical data

Containment level	H2
Working width	W2 ( $W_N \leq 0.8$ m)
Impact severity level	ASI B
Vehicle intrusion	VI2 ( $V_{I_N} \leq 0.8$ m)
Barrier A	REBLOC 80H_8 H2/W5
Barrier B	TSS Jerseybaer H2/W1
Required elements	REBLOC 80H_JB90_8L/R
Installation   Weight REBLOC 80H_8_JB90_8L/R	free standing   approx. 5030 kg
Length of transition	10 m
Application	single-sided
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized

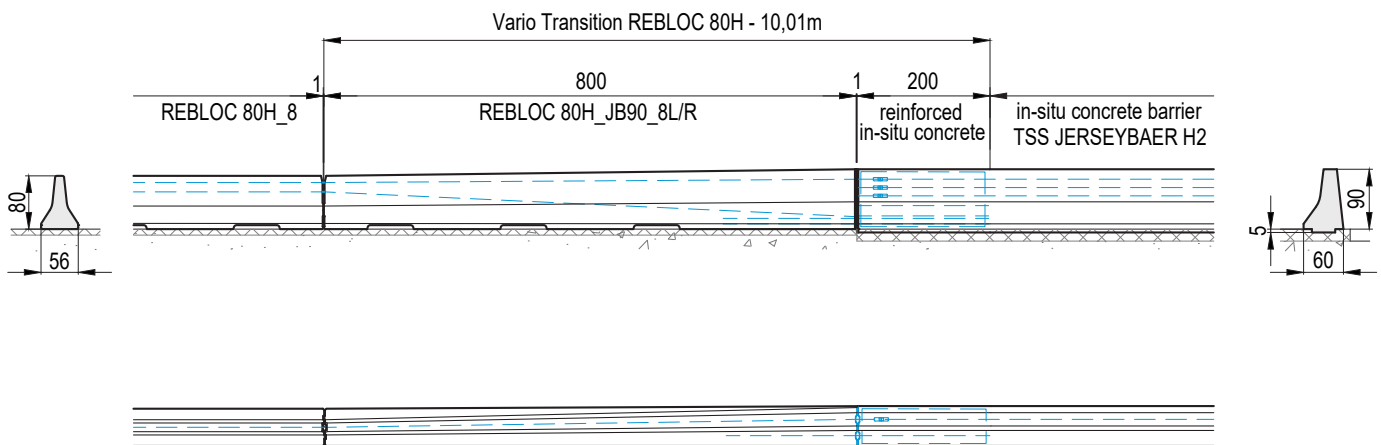

all dimensions in cm