

REBLOC 80S_12


Technical Datasheet

ASI B

REBLOC 80S_12


Precast Concrete
Vehicle Restraint System

Temporary System
Free standing



Technical data

Containment level	H1
Working width	W4 ($W_N \leq 1.3 \text{ m}$)
Impact severity level	ASI B
Vehicle intrusion	VI 5 ($VI_N \leq 1,7 \text{ m}$)
Installation	free standing on asphalt concrete
Application	single-sided double-sided
Minimum installation length	120 m (10 elements) + initial/end anchorage
Initial/end anchorage	required (according to anchor chart 39-10500): e.g. REBLOC 80S_4T_S37 or force closure
Dimensions L x W x H in cm	1200 x 30 x 80 cm
Weight/element	approx. 2980 kg
Curve radius	$r \geq 260 \text{ m}$, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
Features	rubber pads in contact areas for protection of the road surface
CE certification	✓

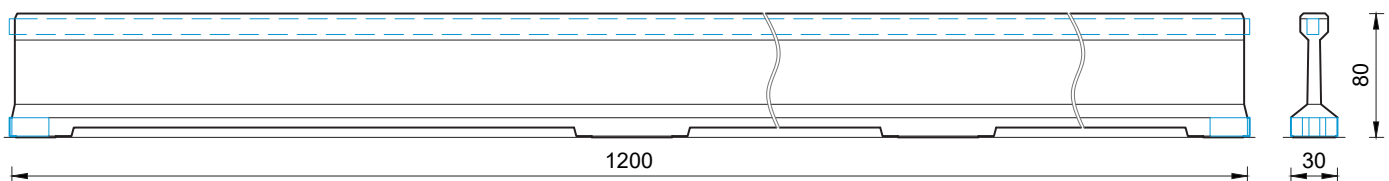

all dimensions in cm